


Product Code : HLR-2420
Power : 4W



Powered by :




HOUSING	LED Housing :	Aluminium Die-Casting
	Body Finish :	White Powder Coated
	Reflector :	Metallized PC
	Heat Shrink :	Aluminium Die-Casted Powder Coated
TECHNICAL SPECIFICATION	Light Source :	SAMSUNG LED
	Beam Angle :	40°
	CCT :	3000K
	CRI :	80
	Chip Lumens (3K) :	380 LM (95Lm/W)
	System Lumens (3K) :	360 LM (90Lm/W) 3K (-5%), 6K (+5%)
ELECTRICAL PARAMETERS	Total Power :	4W
	Ballast Make :	"HYBEC" BIS Approved
	LED Current :	AC LED
	Input Voltage :	220-240 V AC
	Rated Frequency :	50/60Hz
	Power Factor :	-
	THD Ballast :	-
	Life Span :	50,000 hrs
APPLICATION	IP Rated :	IP20
	Use :	Indoor
	Installation :	Recessed Ceiling Mounted.
FITTING SIZE	Dia :	Ø90mm
	Depth :	65mm
	Cut-Out :	Ø80mm

Product Code : HLR-2422
Power : 9W



Powered by :

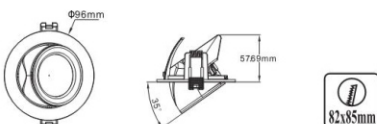

HOUSING	LED Housing :	Aluminium Die-Casting
	Body Finish :	White Powder Coated
	Reflector :	Metallized PC
	Heat Shrink :	Aluminium Die-Casted Powder Coated
TECHNICAL SPECIFICATION	Light Source :	CREE LED
	Beam Angle :	24°
	CCT :	3000K / 4000K / 6000K
	CRI :	80
	Chip Lumens (4K) :	810 LM (90Lm/W)
	System Lumens (4K) :	765 LM (85Lm/W) 3K (-5%), 6K (+5%)
ELECTRICAL PARAMETERS	Total Power :	9W
	Ballast Make :	"HYBEC" BIS Approved
	LED Current :	DC 200mA
	Input Voltage :	220-240 V AC
	Rated Frequency :	50/60Hz
	Power Factor :	0.80
	THD Ballast :	<10%
	Life Span :	50,000 hrs
APPLICATION	IP Rated :	IP20
	Use :	Indoor
	Installation :	Recessed Ceiling Mounted.
FITTING SIZE	Dia :	Ø96x58mm
	Depth :	58mm
	Cut-Out :	Ø82x85mm